

UV/Visible/LED Curable Protective Peel-able Temporary Blue Mask

PRODUCT DESCRIPTION

Incure Litemask™ 8177G UV/Visible/LED curable mask is a 100% solids, high strength peel-able easy, high temperature mask used widely in the electronics and aerospace industry. Cures tack-free in seconds, it forms a tough yet soft peel-able mask for surface protection against chemical stains and burnt marks on metals, glass and ceramics. Contains no VOCs or acids, its ultra-clean formulation does not affect masked surfaces before cure and leaves no residue or contamination after removal. Incure 8177G is ideal for protection of critical surfaces during manufacturing, such as wave soldering process.

UNCURED PROPERTIES

| | | | | |
|---|---|------------------|---------------------|------------|
| Chemical Type | Urethane Acrylate, 100% Solids, No Solvents | | | |
| Appearance | Single Component, Clear Blue | | | |
| Density, g/ml | 1.12 | Refractive Index | N.A. | @20°C |
| Flash Point, °C | > 93 | Toxicity | Low (Refer to MSDS) | |
| Viscosity, cP (rpm) | 0.5 | > 1,000,000 | Spindle | 7 |
| Other viscosities are available upon request. If the viscosity range requested is not our standard offering, this product may be produced with a small lab fee. | | | | ASTM D2556 |
| Email us at: support@uv-incure.com or your nearest local distributor for more information. | | | | |

¹ Viscosity (cP) taken at 25°C - Call to enquiry for other viscosities.

CURED PROPERTIES

| | | |
|---|---|-------------------------|
| Shore Hardness, Durometer | A15 to A25 | ASTM 2240 |
| Linear Shrinkage / Expansion (-ve) | 1.50% | ASTM 570 |
| Water Absorption at 24hrs | 0.50% | ² ISTM D2566 |
| Tensile (PSI) | PC-PC / PC-SS 3,600 / 1,300 PC-S / PC-AL 1,100 / 1,200 | ASTM 638 |
| Surface After Full Cure | Tack-Free | ² ISTM D189 |
| Elongation at Break | 184% | ASTM 638 |
| Thermal Range (Brittleness / Degrades) °C | -55 to 160 | ² ISTM D366 |
| Young's Modulus of Elasticity, MPa (PSI) | 78 () | ³ ASTM 638 |
| Average Linear CTE, ppm/°C | 102 | ² ISTM D696 |

² ISTM - refers to Incure Standard Test Method.

³ ASTM 638 Young's Modulus test speed @5mm/min for rigid and semi-rigid materials, @50mm/min for non-rigid materials, unless otherwise specified.

RECOMMENDED UV CURE SCHEDULE (FULL CURE)

| Full Cure Exposure Time | | UVA | UVB | UVC | UVV | |
|-----------------------------------|--------------------|--------------------|-------|-----|-------|-------|
| Fixture Time between glass slides | mW/cm ² | 150 | 43 | 5 | 140 | |
| Exposure Time (s) | 2.0 | mJ/cm ² | 300 | 86 | 10 | 280 |
| F200P™ @3.75" Dist | 3.0 | mW/cm ² | 150 | 43 | 5 | 140 |
| Belt Speed (ft/min) | 28.0 | mJ/cm ² | 450 | 129 | 15 | 420 |
| F500™ @3.0" Dist | 1.0 | mW/cm ² | 500 | 160 | 15 | 480 |
| Belt Speed (ft/min) | 18.0 | mJ/cm ² | 500 | 160 | 15 | 480 |
| S20™ Spot (4-Pole LG) 0.4" Dist | mW/cm ² | 3,000 | 530 | 50 | 3,400 | |
| Exposure Time (s) | 1.0 | mJ/cm ² | 3,000 | 530 | 50 | 3,400 |
| L9000™ LED Spot @ 0.67" Dist | mW/cm ² | 2,800 | 42 | 12 | 102 | |
| Exposure Time (s) | 1.0 | mJ/cm ² | 2,800 | 42 | 12 | 102 |

Cure times on 8mm ø adhesive sample. Belt speeds using C9000-F200Px1AB (Flood) and C9000-F500x1AC (Focused Beam) conveyors for area curing. Please consult IncureLab™ for any other requirements.

UV INTENSITY REFERENCE TABLE

| Incure UV Curing Lamp Model | Curing Distance vs UV Intensity | | | | | |
|---|------------------------------------|------------|------------|------------|-------------|-----------|
| | 0.5" (12.6) | 1" (25.4) | 1.5" (38) | 2" (50.8) | 2.5" (63.5) | 3" (76.2) |
| Spot Curing (ø mm) | 0.5" (12.6) | 1" (25.4) | 1.5" (38) | 2" (50.8) | 2.5" (63.5) | 3" (76.2) |
| S20™ ARC (mW/cm ²) / (ø mm) | 1,400 (3) | 1,500 (4) | 650 (6) | 360 (8) | 240 (10) | 175 (12) |
| L9000™ LED (mW/cm ²) / (ø mm) | 7,500 (9) | 5,000 (10) | 2,300 (17) | 1,200 (20) | 700 (25) | 450 (30) |
| Flood/Focus Beam - Area Curing | UV Intensity (mW/cm ²) | | | | | |
| F200™ ARC Flood (6" x 8") | 325 | 280 | 245 | 215 | 190 | 165 |
| F400™ ARC Flood (4" x 4") | 860 | 570 | 440 | 345 | 270 | 215 |
| F500™ ARC Focused (3" x 5") | 1,040 | 685 | 530 | 415 | 325 | 260 |
| L1044-365™ LED Flood (4" x 4") | 2,675 | 2,380 | 1,900 | 1,625 | 1,430 | 1,280 |
| L1044-405™ LED Flood (4" x 4") | 2,950 | 2,625 | 2,150 | 1,900 | 1,650 | 1,450 |

⁴ Curing Distance is defined by the tip of light-guide or base of lamp housing to the bond area. All values are nominal with ±10% variation, with LED Flood Static Uniformity at ±78% and Dynamic Uniformity at ±90%. Recommended curing parameters in grey.

CURING SCHEDULE FOR THIS PRODUCT (Not Applicable for this Product)

If you are unable to fully cure this product for some reasons, pls email us for assistance with your curing information. Below are the curing parameters:

| | | | |
|--|--|---|--|
| UVA (320-400nm) = 500 mW/cm ² | UVB (290-320nm) = 160 mW/cm ² | UVC (290-220nm) = 15 mW/cm ² | VUV (400-700nm) = 480 mW/cm ² |
|--|--|---|--|

Note: This product has been thoroughly tested to cure with F200P™ UV Flood Lamp. Intensity wavelengths (shaded) are crucial for curing this product. All measurements are made with EIT UV PowerPuck II.

SHELF-LIFE, STORAGE, USE AND HANDLING OF THIS PRODUCT

Shelf-Life of this unopened product is a minimum of ONE (1) year from date of manufacture. Avoid direct exposure of bottle to visible light at all times. Containers should remain covered when not in use. Product should be stored in a dark cool place of 2°C to 20°C. Transfer of product into other packages void all warranties. Users should ensure all bonding surfaces are free of grease, mold release, or any contaminants, as bonding performance will be compromised. All tests for cured bonds should be carried out at ambient temperature. For safe handling of this product, please read Material Safety Data-sheet (MSDS) prior to use. Organic solvents, such as IPA, may be used to wipe away uncured material from surfaces.


EtO and GAMMA STERILIZATION (Not Applicable for this Product)

All Incure Medical products are formulated to subject to standard sterilization methods, such as EtO and Gamma Radiation of 25 to 50 kGrays (cumulative). Enhanced moisture and thermal resistance of this product show excellent adhesion and bonding strength after one cycle of steam auto-clave test. Depending on bond design and structure of the application, users should test specific assemblies after subjecting them to the test requirements. Please consult Incure Support Team for assistance, if your devices are subjected to more than one sterilization cycles.

NOTE

The data contained in this document are furnished for information only. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein. INCURE will not be liable for any indirect, special, incidental or consequential loss or damage arising from this INCURE product, regardless of the legal theory asserted. INCURE recommends that each user adequately test its proposed use and application before repetitive use, using this data as a guide.

TENSILE STRENGTH VS TEMPERATURE

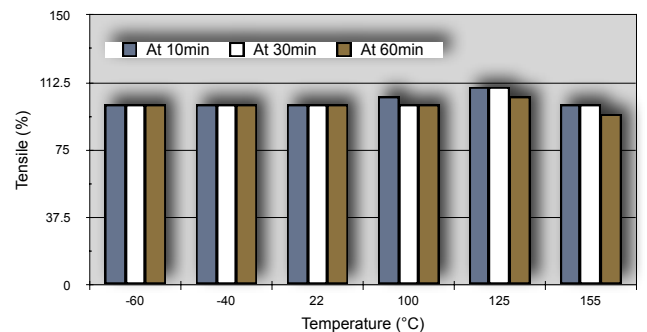

SECONDARY HEAT CURE (Not Applicable)

| Continuous Oven Bake | Duration |
|----------------------|----------|
| 95°C (203°F) | 120 mins |
| 110°C (230°F) | 60 mins |
| 125°C (257°F) | 30 mins |

Incure, Inc.
1 Hartford Square, Box 16 West,
Suite C-3, New Britain,
CT 06052, USA
Tel: (860) 748 2979
support@uv-incure.com

Incure Adhesives Manufacturing Pte Ltd
33 Ubi Avenue 3 #04-23,
Vertex Tower B,
Singapore 408868
Tel: (65) 6509 3670
www.uv-incure.com

